



Airport Baggage Trailers

AIRPORT TECHNOLOGY



Airport Baggage Trailers

Technical specifications	KBT2000-02	KBT1300-02
Loading capacity [kg]	2000	1300
Trailer self-weight [kg]	450	405
Max. towing speed [km/h]	40	40
Wheels	4,00-8 Solid	4,00-8 Solid
A - Overall length [mm]	4190	4040
B - Overall length with drawbar in vertical position [mm]	3285	3165
C - Loading platform length [mm]	2525	2525
D - Basket length [mm]	1340	1040
E - Loading platform width [mm]	1525	1300
F - Overall height [mm]	1325	1325
G - Loading platform height above ground [mm]	520	520
H - Sidewall height [mm]	1175	1176
J - Rear coupling height [mm]	250	250
K - Wheel base [mm]	1600	1600
L - Towing eyelet diameter [mm]	42,5	42,5

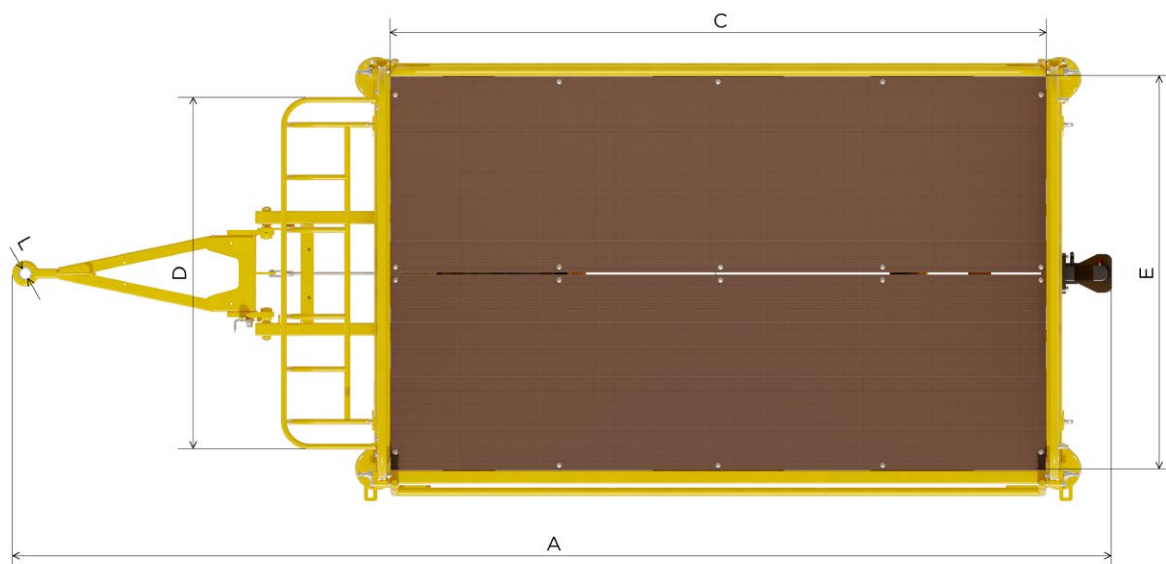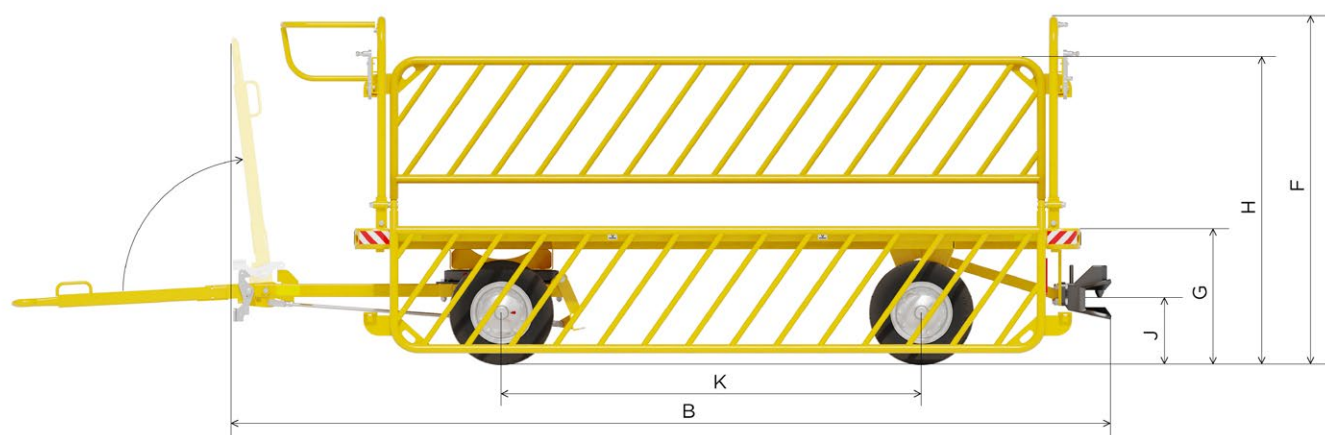


KEY FEATURES

- Durable, fully welded high-grade steel construction
- With components from renowned manufacturers (Jost, Continental, Rockinger...)
- Comfortable handling with automatic sidewall latching
- Easily replaceable parts
- Low maintenance costs & long operation life
- Hitching of up to 7 trailers together
- Front wheel parking brake - activated by raising the drawbar to vertical position
- Foot-operated towbar latch release
- Snap-on basket - front or rear position
- Durable 3-layer powder coated surface
- Compact freight packaging (stackable by folding of all 4 walls)

CUSTOMIZATIONS & OPTIONS

- Alternative towing eyelets and rear couplings
- Parking brake activation also by lowering the drawbar
- Surface finish in any RAL colour
- Hot-dip galvanized surface treatment
- Tarpaulin or solid cover
- Forklift pockets
- Other modifications upon consultation

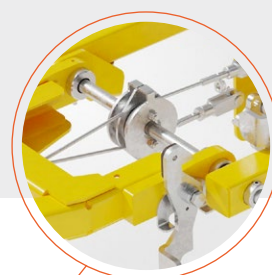

OPTION
Up & down brake activation




Automatic sidewall latching

OPTION
Solid covering



Compact packaging



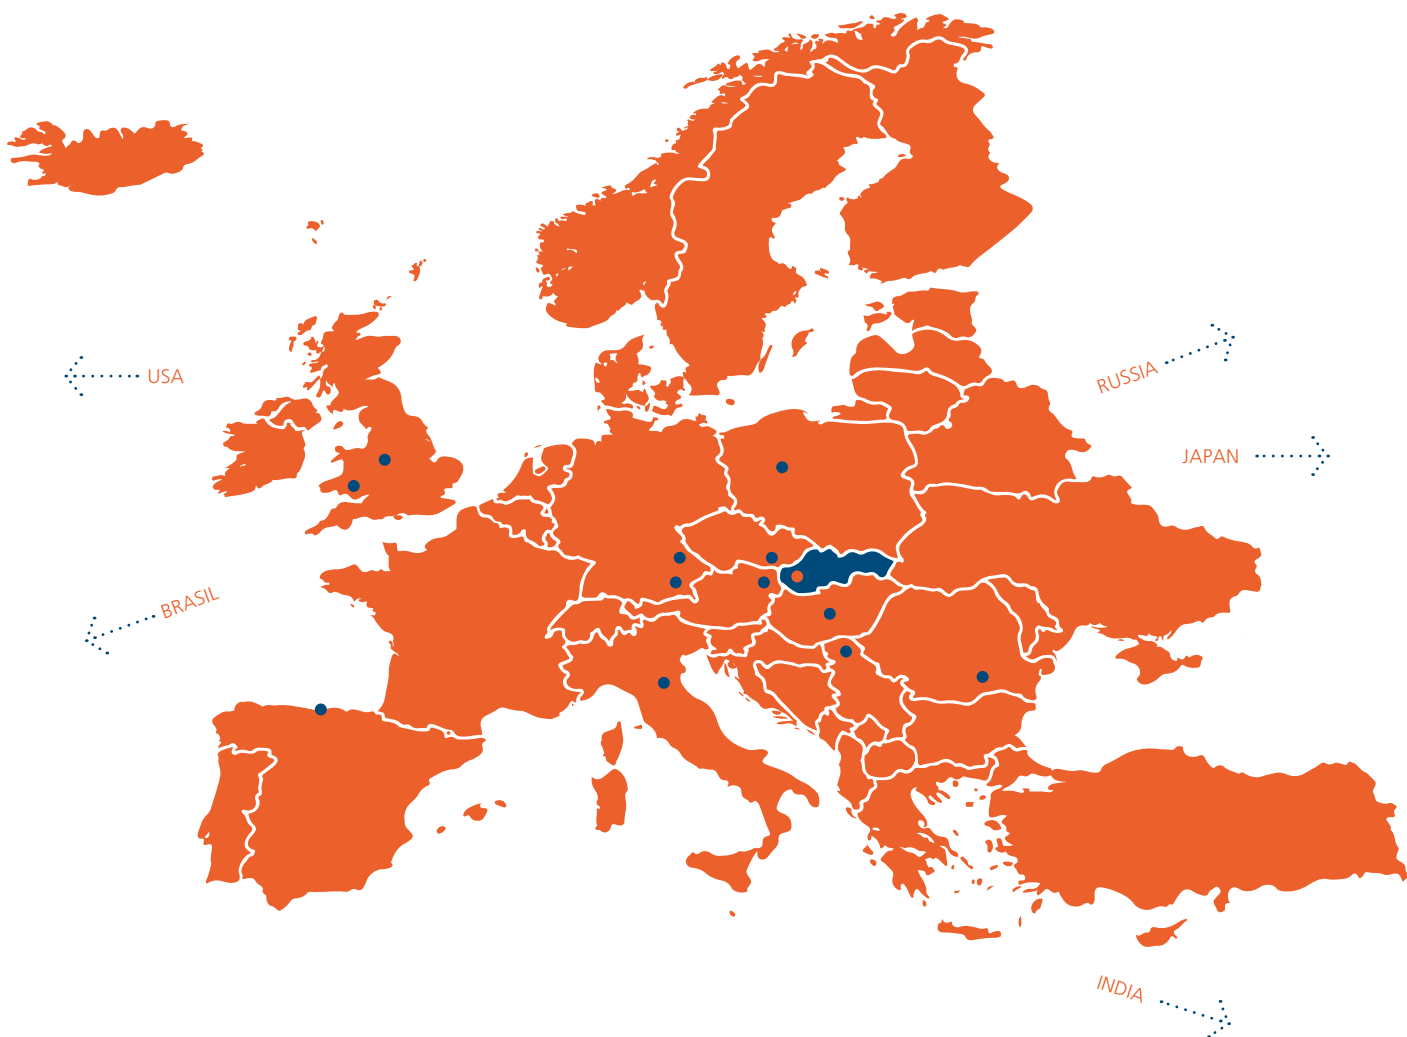

KNOTT SLOVAKIA YOUR TAILOR-MADE MANUFACTURER

As a strategic member of the KNOTT Group we develop and produce key products in trailer technology. We are also involved in the production of sophisticated industrial brakes and have evolved into a high-quality airport ground support equipment manufacturer as well.

The ability to tailor our products to customer's needs, along with professional consulting and cooperation since the early development stages of a new product, as well as the in-house accredited testing laboratory are the main advantages of our company.

Paying attention to customer feedback, combining newest technologies with know-how based on decades-long experiences, and the implied highest product quality are characteristic for all companies within the Knott Group.

KNOTT spol. s r.o.

Dolná 142
900 01 Modra
Slovak Republic

tel.: +421 33 690 2511

e-mail: gse@knott.sk

www.knott.sk



KNOTT)))

