




## Container Trailer 10ft

AIRPORT TECHNOLOGY

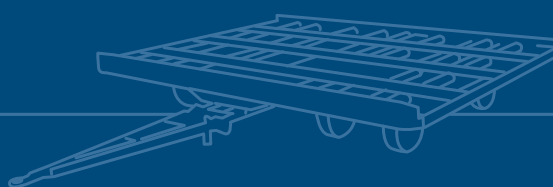

# Airport Container Trailer

Technical specifications	KCT7000-01
Loading capacity [kg]	7000
Trailer self-weight [kg]	1230
Max. towing speed [km/h]	25
Wheels	4,00-8 Solid
Rollers	Ø80mm, length 380mm, galvanized, 40 pieces along 4 rows
Steering Method	Front Swivel castors
ULD / Pallet Capability	2x LD1/LD2/LD3, LD4, LD6, LD7, LD8, LD9, LD11, LD26, LD29, LD39, PLA, P1P, P6P & 108"x 88" & 108"x 96" pallets
A - Overall length [mm]	4704
B - Overall length with drawbar in vertical position [mm]	3436
C - Loading platform length [mm]	2470
D - Loading platform width [mm]	3322
E - Loading platform height above ground [mm]	508
F - Rear coupling height [mm]	268
G - Wheel base [mm]	1349
H - Towing eyelet diameter [mm]	42,5

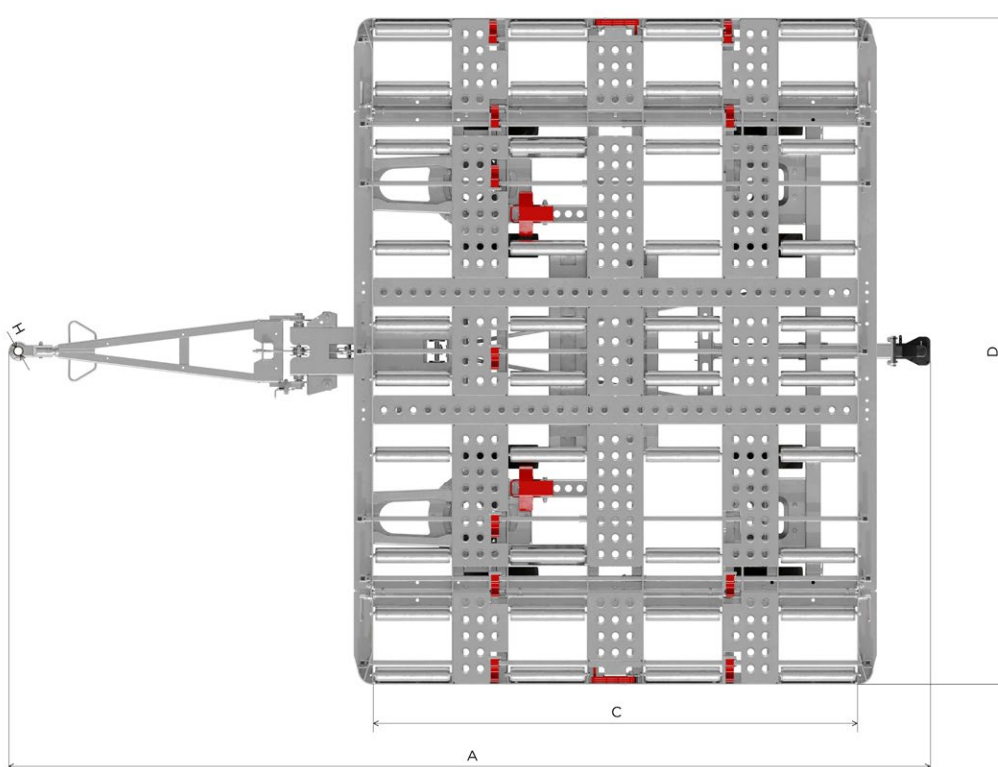
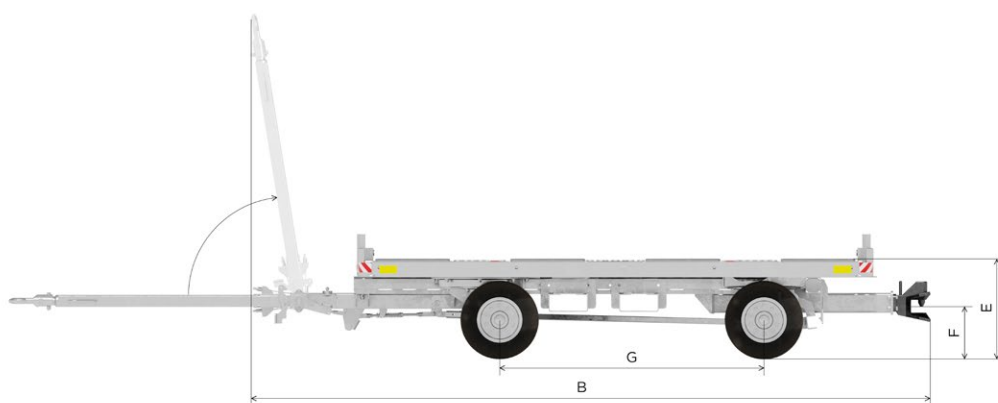


## KEY FEATURES

- Durable, fully welded high-grade steel construction
- With components from renowned manufacturers (Jost, Continental, Rockinger...)
- Handle-operated flip-up stops securing the ULD / pallet
- ULD / pallet side guide rails
- Easily replaceable parts
- Low maintenance costs & long operation life
- Hitching of up to 4 trailers together
- Rear wheel parking brake - activated by raising the drawbar to vertical position
- Foot-operated towbar latch release
- Hot-dip galvanized surface treatment
- Compact freight packaging (stackable, folding side segments)

## CUSTOMIZATIONS & OPTIONS

- Alternative towing eyelets and rear couplings
- Parking brake activation also by lowering the drawbar
- Surface finish in any RAL colour
- Forklift pockets
- Other modifications upon consultation

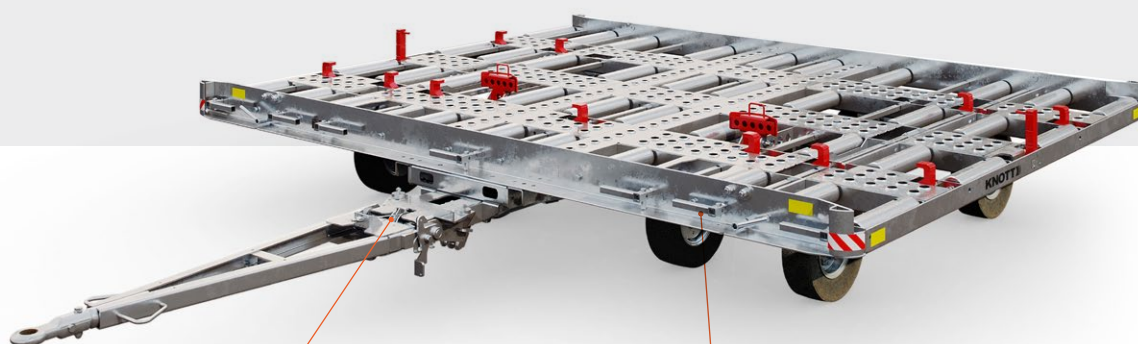

**OPTION**  
Up & down brake activation




Handle operated flip-up stops



Compact packaging



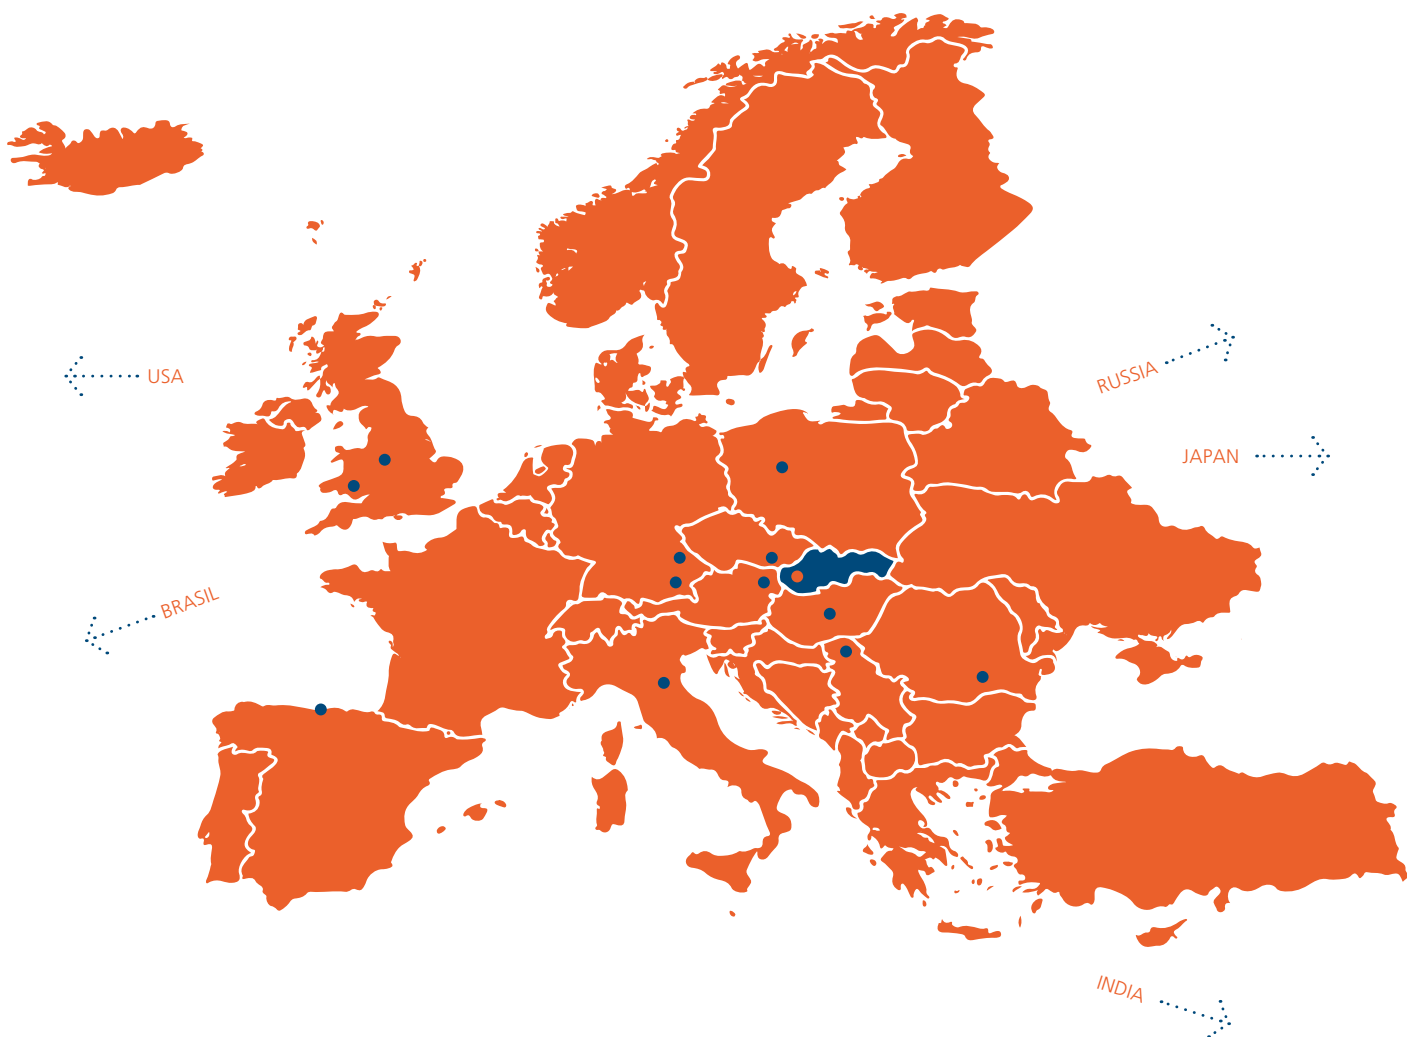

## KNOTT SLOVAKIA

### YOUR TAILOR-MADE MANUFACTURER

As a strategic member of the KNOTT Group we develop and produce key products in trailer technology. We are also involved in the production of sophisticated industrial brakes and have evolved into a high-quality airport ground support equipment manufacturer as well.

The ability to tailor our products to customer's needs, along with professional consulting and cooperation since the early development stages of a new product, as well as the in-house accredited testing laboratory are the main advantages of our company.

Paying attention to customer feedback, combining newest technologies with know-how based on decades-long experiences, and the implied highest product quality are characteristic for all companies within the Knott Group.

#### KNOTT spol. s r.o.

Dolná 142  
900 01 Modra  
Slovak Republic

tel.: +421 33 690 2511

e-mail: [gse@knott.sk](mailto:gse@knott.sk)

[www.knott.sk](http://www.knott.sk)



# KNOTT)))

